


SUNRIDGE

74005-3 SERIES (RIGHT ANGLE MOUNT HEADER)

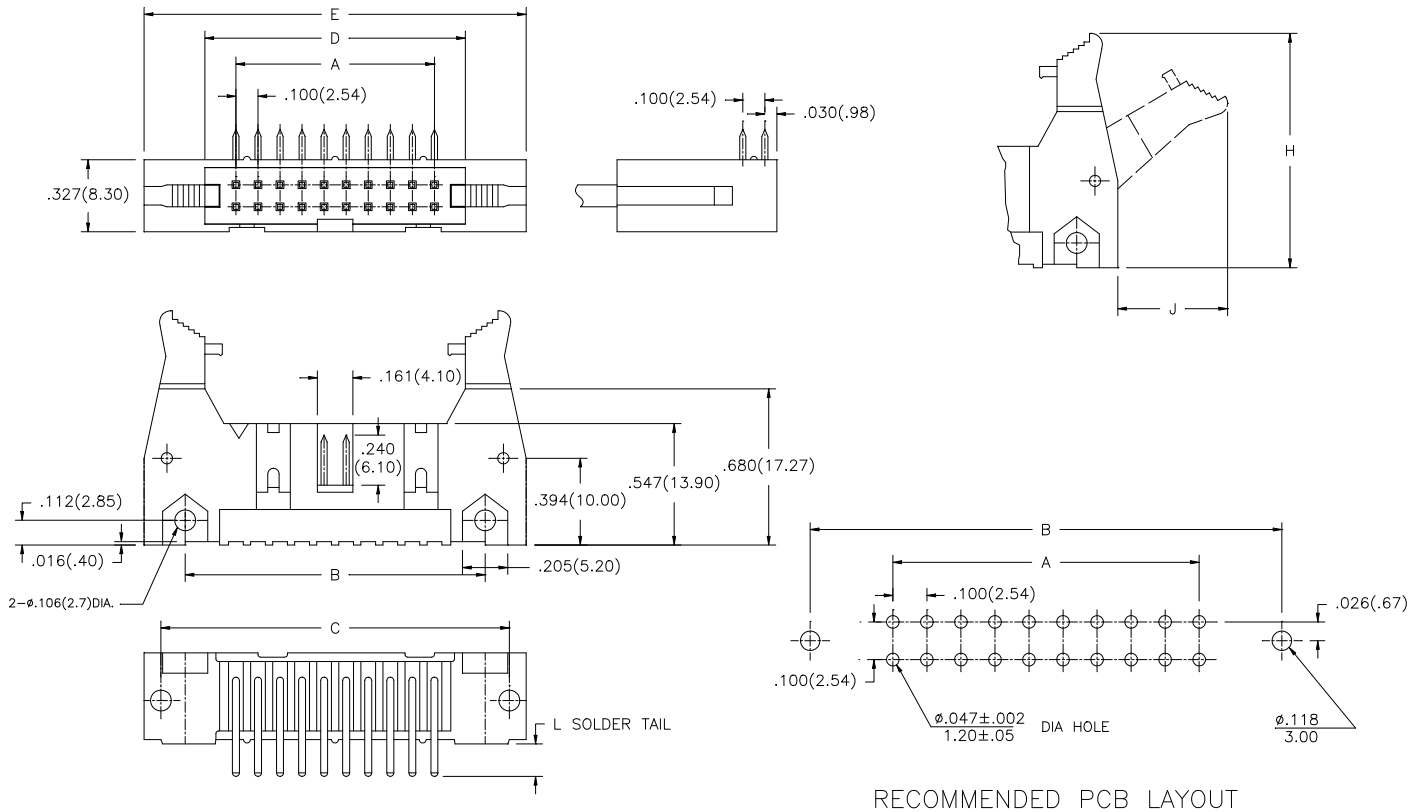

LATCH CONFIGURATION

P/N DESIGNATION

74005 - -

1 2 3 4 5

- 1: MOUNTING OPTION
 - 2: VERTICAL
 - 3: RIGHT ANGLE
- 2: LATCH OPTION
 - 0: NO LATCH
 - 1: SHORT LATCH
 - 2: LONG LATCH
- 3: NO OF CONTACT
- 4: GOLD PLATING THICKNESS OPTION
 - T: TIN PLATED
 - 0: GOLD FLASH
 - 2: 10 u" GOLD
 - 3: 15 u" GOLD
 - 6: 30 u" GOLD
- 5: PIN LENGTH/CONFIGURATION SOLDER TAIL "L"
 - 01: .125" (3.18MM)
 - 02: .155" (3.94MM)
 - 03: .047" (1.19MM)
 - 04: .061" (1.55MM)

SHORT LATCH ACCOMMODATING IDC SOCKET W/O STRAIN RELIEF-

H: 1.015" (25.78MM) MAX
J: .360" (9.14MM) MAX

LONG LATCH (ACCOMMODATING IDC SOCKET WITH STRAIGHT RELIEF)-

H: 1.094" (27.79MM) MAX
J: .490" (12.45MM) MAX

| NO. OF POSITION | P/N | DIMENSIONS IN (MM) | | | | |
|-----------------|----------------|--------------------|--------------|--------------|--------------|---------------|
| | | A | B | C | D | E |
| 10 | 74005-XX10-XXX | .400(10.16) | .860(21.84) | 1.100(27.94) | .690(17.52) | 1.260(32.00) |
| 14 | 74005-XX14-XXX | .600(15.24) | 1.060(26.92) | 1.300(33.02) | .890(22.60) | 1.460(37.08) |
| 16 | 74005-XX16-XXX | .700(17.78) | 1.160(29.46) | 1.400(35.58) | .990(25.14) | 1.560(39.62) |
| 20 | 74005-XX20-XXX | .900(22.88) | 1.360(34.54) | 1.600(40.64) | 1.190(30.22) | 1.760(44.70) |
| 26 | 74005-XX26-XXX | 1.200(30.48) | 1.660(42.16) | 1.900(48.28) | 1.490(37.84) | 2.060(52.32) |
| 30 | 74005-XX30-XXX | 1.400(35.58) | 1.860(47.24) | 2.100(53.34) | 1.690(42.92) | 2.260(57.40) |
| 34 | 74005-XX34-XXX | 1.600(40.64) | 2.060(52.32) | 2.300(58.42) | 1.890(48.00) | 2.460(62.48) |
| 40 | 74005-XX40-XXX | 1.900(48.28) | 2.360(59.94) | 2.600(66.04) | 2.190(55.62) | 2.760(70.10) |
| 50 | 74005-XX50-XXX | 2.400(60.96) | 2.860(72.64) | 3.100(78.74) | 2.690(68.32) | 3.260(82.80) |
| 60 | 74005-XX60-XXX | 2.900(73.66) | 3.360(85.34) | 3.600(91.44) | 3.190(81.02) | 3.760(95.50) |
| 64 | 74005-XX64-XXX | 3.100(78.74) | 3.560(90.45) | 3.800(96.52) | 3.390(86.10) | 3.960(100.58) |